

DS-D5024FC

24" LCD Display Monitor



Hikvision's DS-D5024FC 24-inch LCD monitor provides excellent color rendition and enhanced, 1080p resolution. It features an LED direct-lit backlight with uniform brightness and no boundary shadow.

The DS-D5024FC is constructed of high-quality components and materials for 24/7 use.


Available Models:
DS-D5024FC

- 1080p Resolution
- LED Backlit Technology
- Wide Angle View: 170° (H)/160° (V)
- 3D Comb Filter
- 3D De-Interlace
- 3D Noise Reduction
- Multiple Inputs: HDMI, VGA, BNC, Audio
- Outputs: BNC
- Supports Analog Input
- Built-In Speaker
- External Video Play via USB Port
- Highly Reliable 24h/Day Functioning

Specifications

DS-D5024FC	
Display Type	LED Backlit TFT LCD
Screen Size	23.6"
Pixel Pitch (H x V)	0.2715 mm x 0.2715 mm
Maximum Resolution	1920 x 1080
Brightness	250 cd/m ² (typical)
Contrast	1000:1
Response Time	5 ms
Color	16.7 M
Viewing Angle	Horizontal 170°, vertical 160°
Input	
VGA	1
HDMI	1
BNC (In/Out)	In x 1; out x 1
Audio	
Audio Input	1 x 3.5 mm mini-jack, 1 x RCA type
Speaker	2 W x 2
Mounting	
VESA	100 mm x 100 mm
General	
Power Supply	100 to 240 VAC
Consumption	< 30 W (on), < 0.5 W (standby)
Operating Temperature	32° F to 104° F (0° C to 40° C)
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-4° F to 140° F (-20° C to 60° C)
Storage Humidity	5% to 95% (no condensation)
Dimensions (W x H x D)	22.1" x 13.3" x 8.6" (561 mm x 339 mm x 218.5 mm)
Weight	Gross weight: 13.22 lbs (6.0 kg), net weight: 11.24 lbs (5.1 kg)
Included Accessories	Power cord x 1, VGA cord x 1, user manual x 1, warranty card x 1, base bracket x 1

Interface

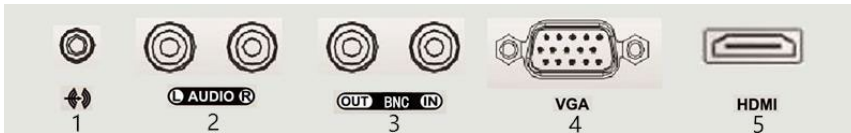

Number	Description
1	3.5 mm Headphone Interface
2	Audio
3	BNC Input and Output
4	VGA Analog Signal Output
5	HDMI Digital Signal Input

Accessories

