


DS-2CE56C2T-IRM HD720p TurboHD Turret Camera


TurboHD™

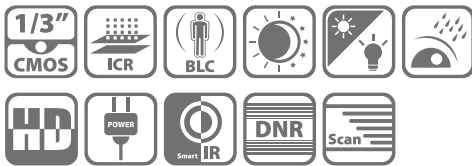

Key Features

- HD720p Video Output
- HD-TVI Standard Technology
- True Day/Night
- DNR, Smart IR
- 20 Meters IR Range
- IP66 Weatherproof

Dimensions

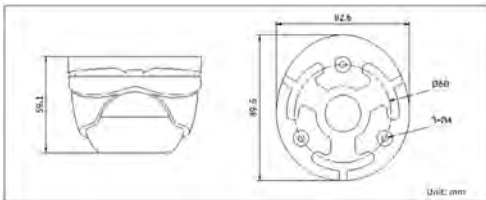

DS-2CE56C2T-IRM	
Camera	
Image Sensor	1/3" progressive scan CMOS
Effective Pixels	1280 x 720
Minimum Illumination	0.043 lux @ (f/2.5, AGC on), 0 lux with IR
Shutter Speed	1/30 sec. to 1/50,000 sec.
Lens	3.6 mm, f/2.5 (2.8 mm, 6 mm optional) Angle of view: 76.88° (3.6 mm), 99.73° (2.8 mm), 50.1° (6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°
Day/Night	IR cut filter
Synchronization	Internal synchronization
Video Frame Rate	30 fps (NTSC)
HD Video Output	1 analog HD output
S/N Ratio	More than 52 dB
General	
Working Temperature/ Humidity	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ±10%
Power Consumption	Maximum 3.5 W
Weatherproof Rating	IP66
IR Range	Up to 20 meter IR range
Dimensions	89.6 mm × 59.1 mm (3.53" × 2.33")
Weight	400 g (0.88 lb.)

Accessories



WMS + PC110T



Video Balun
DS-1H18

Order Models

DS-2CE56C2T-IRM