



## Key Feature

- Modular door station Main unit, needs mouting bracket
- 2MP HD Camera, Fish eye, IR Supplement
- 1 Call physical Button, 2 lock relays, 4-ch alarm input
- Video intercom to indoor station and master station
- WEB Configuration
- IP65, 12 VDC or standard POE
- Power output for electronic lock, max to 12 V, 150 mA

## Specification

### System parameters

Operating system	Embedded Linux operation system
ROM	32 MB
RAM	256 MB
CPU	Embedded Processor

### Display parameters

Screen size	NA
Operation method	NA
Type	NA
Resolution	NA

### Video parameters

Supplement light	Low illumination, IR supplement lights
Video standard	H.264
Lens	1
FOV	Horizontal: 146° , Vertical: 82°
WDR	Support
Resolution	2 MP

### Audio parameters

Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable

### Capacity

Fingerprint capacity	/
User capacity	2000
Card capacity	6000
Face capacity	NA
Linked indoor station capacity	500
Event capacity	/
Sub door station capacity	16

### Network parameters

Ethernet	10/100 Mbps Self-Adaptive Ethernet
Communication protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	NA
Bluetooth	NA



3G/4G	NA
<b>Device interfaces</b>	
Alarm input	4 (2 exit buttons and 2 door contacts by default)
TAMPER	1
I/O input	4
Network interface	1 RJ45
I/O output	2
Exit button	2 (2 for lock control)
Door contact input	2
RS-485	1 (1 for Hikvision's sub module communication)
Wiegand	NA
TF card	NA
Alarm output	NA
Lock control	2 (2 relay, max to 30 V, 2 A)
USB	NA
Power interface	12 VDC power output (max to 12 V, 150 mA)
Two-wire IP interface	NA
<b>General</b>	
Power supply	12 VDC/PoE ( IEEE 802.3af)
Working temperature	-40° C to 60° C (-40° F to 140° F)
Working humidity	10% to 95%
Button	1
Protective level	IP65
Installation	Flush mounting
Dimensions(L × W × H)	Device: 98 mm × 100 mm × 42 mm (3.86" × 3.94" × 1.65")
	Cover: 134 × 124 × 4 mm (5.28" × 4.88" × 0.16")
	Gang Box: 134 × 135 × 56 mm (5.28" × 5.31" × 2.20")
Language	English,French,Portuguese,Brazilian Portuguese,Spanish,Russian,German,Italian,Polish,Turkish,Vietnamese,Arabic,Czech,Hungarian,Dutch,Romanian,Bulgarian,Ukrainian,Croatian,Serbian,Greek,Slovak
Indicator	0
Weight	Without package: 0.375 kg With Package: 0.853 kg
Battery	/

Application environment	Outdoor
Power consumption	≤ 5 W

## Available Model

DS-KD8003-IME1(B)/Flush

## Dimension

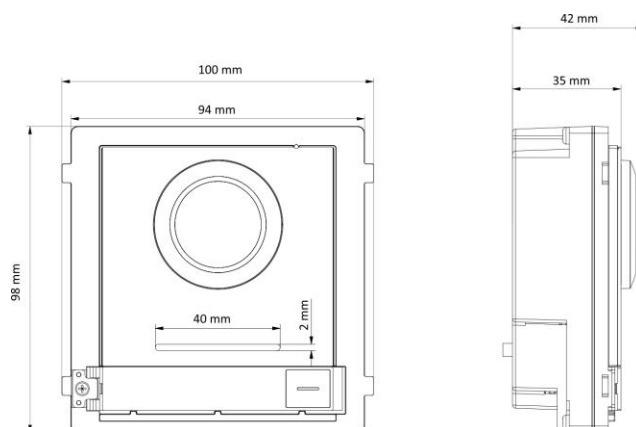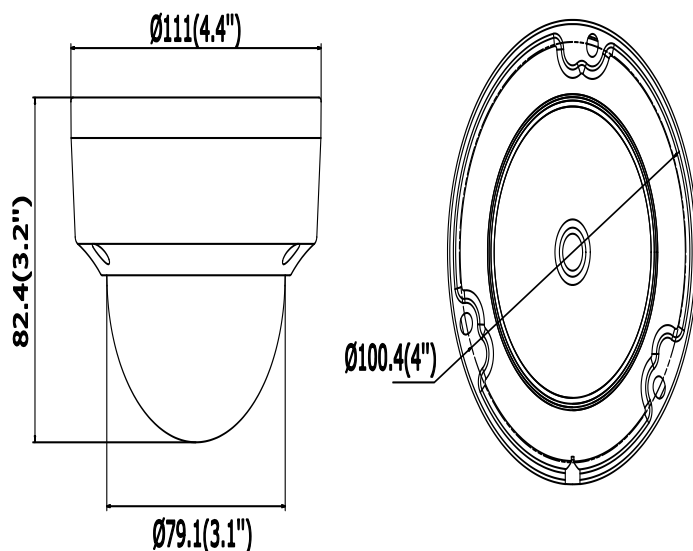

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

