

DS-2DF6A236X-AEL

2 MP Outdoor 36x Network Speed Dome



- **1/1.9" Progressive Scan CMOS**
- **Up to 1,920 x 1,080 Resolution**
- **Minimum Illumination:**
Color: 0.002 Lux @ (f/1.5, AGC On)
B/W: 0.0002 Lux @ (f/1.5, AGC On)
0 Lux with IR
- **H.265+/H.265 Video Compression**
- **36x Optical Zoom, 16x Digital Zoom**
- **Improved Smart Tracking**
- **Smart Detection: Line Crossing, Intrusion, Region Enter/Exit**
- **Rapid Focus**
- **Digital WDR, 3D DNR, HLC**
- **IP67, IK10 Protection**
- **24 VAC/Hi-PoE, 60 W**

Hikvision DS-2DF6A236X-AEL Network Speed Dome Cameras produce images with a resolution of up to 1,920 x 1,080 pixels.

The embedded 1/1.9" progressive scan CMOS chip supports Digital WDR, and the 36x optical zoom allows for greater detail to be collected over more expansive areas.

The Network Speed Dome Camera also features a wide range of smart functions, including intrusion detection, line crossing detection, and audio exception, which allows for key events and objects to be recorded for further forensic needs.

The camera also supports Rapid Focus, which allows for the camera to maintain focus while the lens is zoomed, eliminating auto-focus hunting, and producing clear images at all times.

Smart tracking is included in this model, and enables the camera to detect moving objects by following them within the camera's area of coverage.








Available models:
DS-2DF6A236X-AEL



Specifications

DS-2DF6A236X-AEL	
Camera Module	
Image Sensor	1/1.9" progressive scan CMOS
Minimum Illumination	Color: 0.002 lux @ (f/1.5, AGC on); B/W: 0.0002 lux @ (f/1.5, AGC on); 0 lux with IR
Shutter Speed	1/1 to 1/30,000 s
White Balance	Auto/manual/ATW (auto-tracking white balance)/indoor/outdoor/fluorescent lamp/sodium lamp
AGC	Auto/manual
Day/Night	IR cut filter
Digital Zoom	16x
Privacy Mask	24 programmable privacy masks
Focus Mode	Auto/semi-automatic/manual
WDR	120 dB
Rapid Focus	Supported
Lens	
Focal Length	5.7 mm to 205.2 mm, 36× optical zoom
Zoom Speed	Approximately 4.4 s (optical lens, wide to tele)
Angle of View	Horizontal field of view: 59.8° to 2.0° (wide to tele); vertical field of view: 33.6° to 1.1° (wide to tele); diagonal field of view: 68.6° to 2.3° (wide to tele)
Minimum Working Distance	10 mm to 1,500 mm (wide to tele)
Aperture Range	f/1.8 to f/5.5
PTZ	
Movement Range (Pan)	360° endless
Pan Speed	Configurable, from 0.1°/s to 300°/s, Preset Speed: 540°/s
Movement Range (Tilt)	From -20° to 90° (auto-flip)
Tilt Speed	Configurable, from 0.1°/s to 240°/s, Preset Speed: 400°/s
Proportional Zoom	Supported
Presets	300
Patrol Scan	8 patrols, up to 32 presets for each patrol
Pattern Scan	4 pattern scans, record time over 10 minutes for each scan
Power-off Memory	Supported
Park Action	Preset/pattern scan/patrol scan/auto scan/tilt scan/random scan/frame scan/panorama scan
3D Positioning	Supported
PTZ Status Display	Supported
Preset Freezing	Supported
Scheduled Task	Preset/pattern scan/patrol scan/auto scan/tilt scan/random scan/frame scan/panorama scan/dome reboot/dome adjust/aux output
Compression Standard	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub-stream: H.265/H.264/MJPEG; third stream: H.265/H.264/MJPEG
H.264 Type	Baseline profile/main profile/high profile
H.264+	Supported
H.265 Type	Main profile
H.265+	Supported
Video Bitrate	32 kbps to 16,384 kbps
Audio Compression	G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2/PCM
Audio Bitrate	64 kbps (G.711)/16 kbps (G.722.1)/16 kbps (G.726)/32 to 160 kbps (MP2L2)
Smart Features	
Perimeter Protection	Intrusion detection, line crossing detection, region entrance detection, region exiting detection, alarm triggering by specific target types (humans and vehicles). Filtering out of false alarms caused by leaves, light, animals, flags, and other such target types
Event Detection	Audio exception detection
Smart Tracking	Manual tracking, auto tracking (supports tracking specified target types such as humans and vehicles), event tracking
Smart Recording	ANR (Automatic Network Replenishment), Dual-VCA
ROI	Supported
Image	
Maximum Resolution	1,920 x 1,080
Main Stream	30 fps (1920 x 1080, 1280 x 960, 1280 x 720), 60 fps (1920 x 1080, 1280 x 960, 1280 x 720)
Sub-Stream	30 fps (704 x 480, 640 x 480, 352 x 240)
Third Stream	30 fps (1920 x 1080, 1280 x 960, 1280 x 720, 704 x 480, 640 x 480, 352 x 240)
Image Enhancement	HLC/BLC/3D DNR/Defog/EIS/Regional Exposure/Regional Focus
SVC	Supported
Network	
Network Storage	Built-in memory card slot, support microSD/SDHC/SDXC, up to 256 GB; NAS (NFS, SMB/CIFS), ANR
Alarm Linkage	Alarm actions such as preset, patrol scan, pattern scan, memory card video record, trigger recording, notify surveillance center, upload to FTP/ memory card/NAS, send e-mail, etc.
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, DHCP, PPPoE, Bonjour
API	Open-ended, support ONVIF, ISAPI, and CGI, support for HIKVISION SDK and third-party management platforms
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. Three levels: administrator, operator, and user
Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption; IEEE 802.1x port-based network access control; IP address filtering
Client	iVMS-4200, iVMS-4500, Hik-Connect
Web Browser	IE 8 to 11, Chrome 31.0 to 44, Firefox 30.0 to 51
Interface	
Alarm	7-ch alarm input/2-ch alarm output
Audio	1-ch audio input/1-ch audio output
Network Interface	1 RJ-45 10 M/100 M Ethernet Interface, Hi-PoE
RS-485	Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive
BNC	1.0 V (p-p)/75 Ω, NTSC (or PAL) composite, BNC
General	
Power	24 VAC (maximum 60 W); Hi-PoE (maximum 50 W)
Working Temperature	-40° to 158° F (-40° to 70° C); humidity: ≤90% non-condensing
Protection Level	IP67 standard, IK10, TVS 6,000V lightning protection, surge protection, and voltage transient protection
Material	Aluminum alloy
Dimensions	Ø9.10" x 14"(Ø231.1 mm x 355.6 mm)
Weight	Approximately 13.23 lb (6 kg)

Accessories

NOT INCLUDED						
						
JBPW-L-G Wall Mount	CPM-L-G Long Pendant Mount	CPMPE-G Pendant Mount Extension	CPM-S-G Short Pendant Mount	RPM-G Parapet Mount Extendable Pole	PMP-JB-G Vertical Pole Mount	CMP-JB-G Corner Mount


INCLUDED



(actual product appearance may vary)

G1.5 Adapter
Converts Hikvision Quick Release To G 1.5" Thread

Dimensions

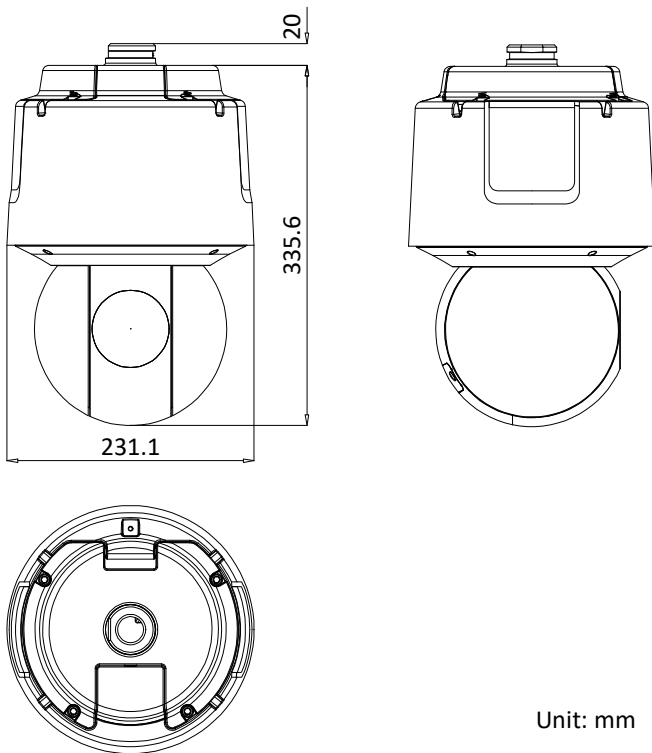

Unit: mm

Box Contents (Subject to Change without Notice)

BNC Connector
Camera Top
Mounting Posts
PoE Injector
Power Cord
Power Filter
Power Pigtail with Screw Terminals
Quick Start Guide
Quick Release to G1.5" Adapter
Teflon Tape
Steel Washer
Watertight Cable Connector
Watertight Tape
Wrench