

DS-KAD706-P

Video Intercom Two-Wire Distributor

- 6 Two-Wire Cascade Interfaces, Including 1 Interface (Maximum 16 W) Used for Connecting Door Station
- 2 Cascade Interfaces Used for Cascading DS-KAD706-P and DS-KAD706-SP
- 8 Interface Indicators Used for Displaying Network Status of Interfaces

Available Model

DS-KAD706-P




Specifications

Interfaces	
Network Interface	1 RJ-45 (1-ch reserved terminal and 1-ch for WAN access)
Two-Wire Interface	6-ch for device power supply, including 1-ch for door station power supply with max. output power 16 W
Signal Indicator	8 signal indicators for indicating 6-ch input and output signal
Power Indicator	1
Reset	1
General	
Power Supply	Two-wire mode, 24 VDC (power adapter included)
Power Consumption	<9 W
Working Temperature	14° to +104° F (-10° to +40° C)
Working Humidity	10% to 90% (non-condensing)
Dimensions	5.66" × 3.64" × 2.59" (143.7 mm × 92.4 mm × 65.9 mm)
Weight	31.54 oz (0.8942 kg)

Video Audio Distributor

No.	Description	No.	Description
1	Power Indicator	5	Power Input
2	Network Interface	6	Reset Button
3	Cascade Network Indicator	7	Cascade Interface
4	Network Indicator	8	Interface

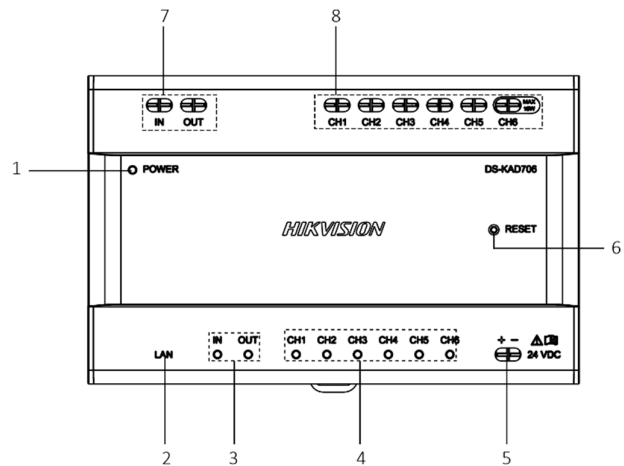

Typical Application

