

DS-2CD2232-I5

3 MP EXIR Bullet Network Camera


EXIR



Key Features

- Full HD1080p Real-Time Video
- 3.0 Megapixel (2048 x 1536) Resolution
- DWDR, 3D DNR, and BLC
- EXIR Illuminators: Up to 50 Meters
- IP66
- PoE

Dimensions

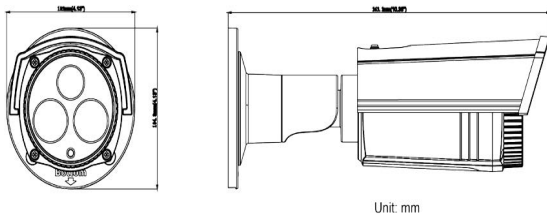

Accessories



CB130
Conduit Base

Order Models

DS-2CD2232-I5

| DS-2CD2232-I5 | |
|-----------------------------|---|
| Camera | |
| Image Sensor | 1/3" progressive scan CMOS |
| Minimum Illumination | 0.19 lux @ f/2.0, AGC on 0 lux with IR |
| Shutter Speed | 1/25 s (1/30 s) to 1/100,000 s |
| Lens | 4 mm @ f/2.0 (6 mm, 12 mm options) angle of view: 75.8° |
| Lens Mount | M12 |
| Day/Night | ICR |
| Digital Noise Reduction | 3D DNR |
| Wide Dynamic Range | Digital WDR |
| Backlight Compensation | Yes, zone configurable |
| Compression Standard | |
| Video Compression | H.264/MJPEG |
| H.264 Compression Profile | Main Profile |
| Bit Rate | 32 Kbps to 16 Mbps |
| Dual Stream | Yes |
| Image | |
| Maximum Image Resolution | 2048 x 1536 |
| Frame Rate | 60 Hz: 15 fps (2048 x 1536), 30 fps (1920 x 1080), 30 fps (1280 x 720) |
| Image Settings | Saturation, brightness, contrast adjustable through client software or Web browser |
| Network | |
| Network Storage | NAS |
| Alarm Triggers | Motion detection, tampering alarm |
| Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1X, QoS |
| System Compatibility | ONVIF, PSIA, CGI, ISAPI |
| General Functionalities | User authentication, watermark |
| Interface | |
| Communication Interface | 1 RJ-45 10M/100M Ethernet port |
| General | |
| Operating Conditions | -30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing) |
| Power | 12 VDC ±10%, PoE (802.3af) |
| Power Consumption | Maximum 7 W (9 W with ICR on) |
| Ingress Protection | IP66 |
| EXIR Range | Up to 50 meters |
| Dimensions | 100.5 mm x 88.1 mm x 157.3 mm (3.96" x 3.47" x 6.19") |
| Weight | 700 g (1.5 lbs) |